

NOVEx II – Explosion isolation flap valve

NOVEx II. Explosion isolation flap valve is a passive mechanical isolation system designed to prevent the propagation of an explosion through process ducts, safeguarding connected equipment.

In the event of a deflagration, the overpressure generated within the duct causes the flap to close instantaneously, effectively blocking flames and combustion gases and preventing the transmission of the explosion to adjacent equipment.

The NOVEx II is supplied in a normally open configuration, allowing continuous process operation with minimal pressure drop. Its compact and robust design facilitates integration into new or existing installations while maintaining a high level of reliability and operational safety.

Key Advantages

- Passive mechanical isolation system, no electrical power required.
- High installation flexibility, suitable for horizontal or vertical mounting, in PUSH or PULL configurations.
- Compact design, ideal for limited spaces.
- Available in a wide range of sizes, from DN100 to DN1250.
- Robust construction, engineered for high dust loads and demanding industrial environments.
- Certified to European explosion isolation standards, suitable for a wide variety of dusts, including metallic dusts.
- Compatibility with NFPA69
- Easy installation on new or existing equipment.

Standards & Certification

- ATEX Certification: LOM 22ATEX1035X in accordance with EN 16447 – Explosion isolation flap valves, and EN 15089 – Explosion isolation systems
- ATEX Marking: Ex II D EN 16447
- NFPA 69 Compatibility: (To ensure compliance additional conditions may be required. Contact ADIX for guidance.)

Applications

The NOVEx II flap isolation valve is designed for industrial processes with dust explosion risks, where duct isolation between connected equipment is required.

Typical applications:


- Dust extraction and filtration systems
- Cyclones
- Storage silos and hoppers
- Elevators, pneumatic and mechanical conveyors
- Processes in the food, chemical, wood, paper, biomass, and metallurgical industries



Main Characteristics


| | | | | | | | | | | | | | |
|--|--|-----|-------|-----|-----|-----|-----|----------|-----|----------|------|------|--|
| Dust type | Organic and inorganic dusts, including metallic dusts $K_{st} \leq 305 \text{ bar}\cdot\text{m/s}$ (MIE $\geq 1 \text{ mJ}$, MIT $\geq 110 \text{ }^\circ\text{C}$) | | | | | | | | | | | | |
| Dust concentration | max. 500 g/m ³ | | | | | | | | | | | | |
| Materials | Painted carbon steel Stainless steel AISI 304 AISI 316 Anti-abrasion or high-temperature options available on request | | | | | | | | | | | | |
| Nominal duct diameter | DN 100 to DN 1250 (DIN 24154 / R2, T2) | | | | | | | | | | | | |
| Installation | Horizontal, vertical, inclined | | | | | | | | | | | | |
| Assembly | PULL or PUSH | | | | | | | | | | | | |
| Working temperature | -20 °C to + 90°C | | | | | | | | | | | | |
| Diameter DN | 100 | 150 | 200 | 250 | 355 | 400 | 500 | 630 | 710 | 900 | 1000 | 1250 | |
| Max. P_{red} vessel | 1 barg | | | | | | | | | 0.5 barg | | | |
| Max. P_{red} vessel (for PUSH and/or metal dust) | 1 barg | | | | | | | 0.5 barg | | | | | |
| Min. distance PULL organic dust to $K_{st} \leq 194 \text{ bar m/s}$ | 5 m | 3 m | 3.5 m | | | | | | 5 m | | | | |
| Min. distance PULL metal dust | 5 m | | | | | | | | | | | | |
| Min. distance PUSH | 5 m | | | | | | | | | | | | |
| Max. distance | 15 m | | | | | | | | | | | | |
| Min. Installation volume (m³) | 0.5 | 1 | | | | | | 2 | 4 | | | | |

Dimensions

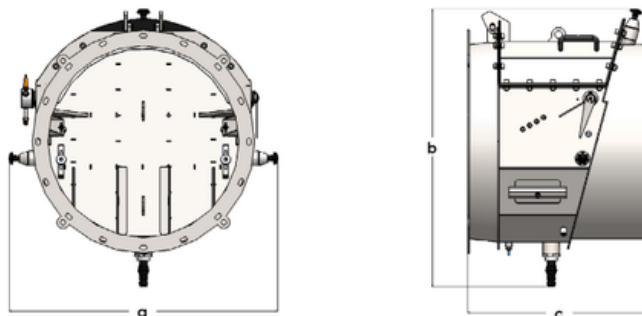

| | | | | | | | | | | | | |
|----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|
| Diameter DN | 100 | 150 | 200 | 250 | 355 | 400 | 500 | 630 | 710 | 900 | 1000 | 1250 |
| Width a (mm) | 305 | 305 | 355 | 405 | 510 | 555 | 655 | 785 | 865 | 1055 | 1155 | 1405 |
| Height b (mm) | 425 | 425 | 475 | 525 | 630 | 675 | 760 | 904 | 984 | 1174 | 1274 | 1524 |
| Length c (mm) | 689 | 389 | 399 | 408 | 428 | 436 | 473 | 607 | 679 | 849 | 939 | 1163 |
| Weight (kg) | 27 | 20 | 24 | 31 | 44 | 50 | 67 | 111 | 135 | 199 | 239 | 357 |
| Screw units | 8 | 16 | | | | 24 | | 32 | | 48 | | 64 |
| Screw size | M8 | M10 | | | | | M12 | | | M16 | | |


Accessories

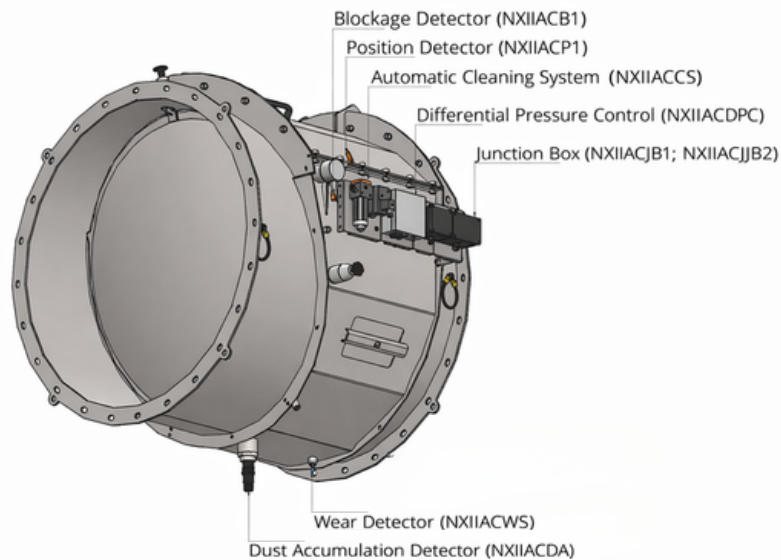

> Counterflanges.

Connection elements for the safe installation of the valve in the duct.
Material: Carbon steel or stainless steel 304/316

- **Benefits:** Facilitate secure installation



> Position Detector / Blockage Detector.

Detection system for monitoring the flap position, either in the normally open condition or after closure and locking.

- Inductive detector for explosive atmospheres
- PNP supply
- Threaded metal housing: M12 x 1 mm / L = 45 mm
- Connector: 1 x M12; coding: A; Contacts: gold-plated
- Ambient temperature: -25...60 °C
- Protection rating: IP67
- ATEX marking: Ex II 3G Ex ec IIC T6 Gc / Ex II 3D Ex tc IIIC T85°C Dc
- **Benefits:** Allows verification of system operation after an event and monitoring of flap position



> Dust Accumulation Detector.

Sensor for detecting dust build-up inside the valve.

- Capacitive detector for explosive atmospheres
- PNP supply
- Threaded housing: M30 x 1.5 mm / L = 150 mm
- Connection terminals: 0.34...1.5 mm²; cable sheath: Ø 5...9 mm; cable gland: M20 x 1.5
- Ambient temperature: -25...60 °C
- Protection rating: IP65; IP67
- ATEX marking: Ex II 3D Ex tc IIIC T90°C Dc
- **Benefits:** Recommended for processes with high dust load, where accumulation can compromise proper flap closure



> **Wear Detector.**

Sensor designed to detect abrasion wear of the flap due to continuous product flow.

- Inductive detector for explosive atmospheres
- NAMUR supply
- Threaded metal housing: M12 x 1 mm / L = 30 mm
- Cable: 2 m, PVC; 2 x 0.34 mm²
- Ambient temperature: -20...80 °C
- Protection rating: IP67
- ATEX marking: Ex II 1G Ex ia IIC T5 Ga Ta -20...80 °C / Ex II 1D Ex ia IIIC T200 100°C Da Ta -20...80 °C
- **Benefits:** Enables anticipation of critical wear situations and planning of maintenance interventions



> **Differential Pressure Control.**

Equipment for measuring pressure on both sides of the valve.

- Differential pressure transmitter
- Range: 0 to 500 mm H₂O (50 mbar)
- Pmax: 750 mbar
- Contact: 2 relays
- Output: 4-20 mA
- Ambient temperature: -10...+60 °C
- Protection: IP65
- ATEX: Ex II 3D T85 °C
- **Benefits:** Useful for monitoring flow and detecting operational deviations in the system



> **Automatic Cleaning System.**

Internal pneumatic cleaning system using periodic compressed air injection.

- Recommended working pressure: 6-8 bar (max. 12 bar)
- Maximum flow: 0.26 m³/h
- Pneumatic connection: Ø 8 mm
- Adjustable cleaning cycles
- Ambient temperature: -10...+50 °C
- Protection rating: IP65
- ATEX marking: II 2D
- **Benefits:** Recommended for very dusty or abrasive processes, where preventing accumulation that could interfere with valve closure is critical



INERIS

Adix reserves the right to make changes without prior notice. All rights reserved.